





Product NO.		DOSIN-806-0043	
REV	DESCRIPTION	DWN	DATE
A	First issue	Zelin.Zhang	2012/04/05
B			

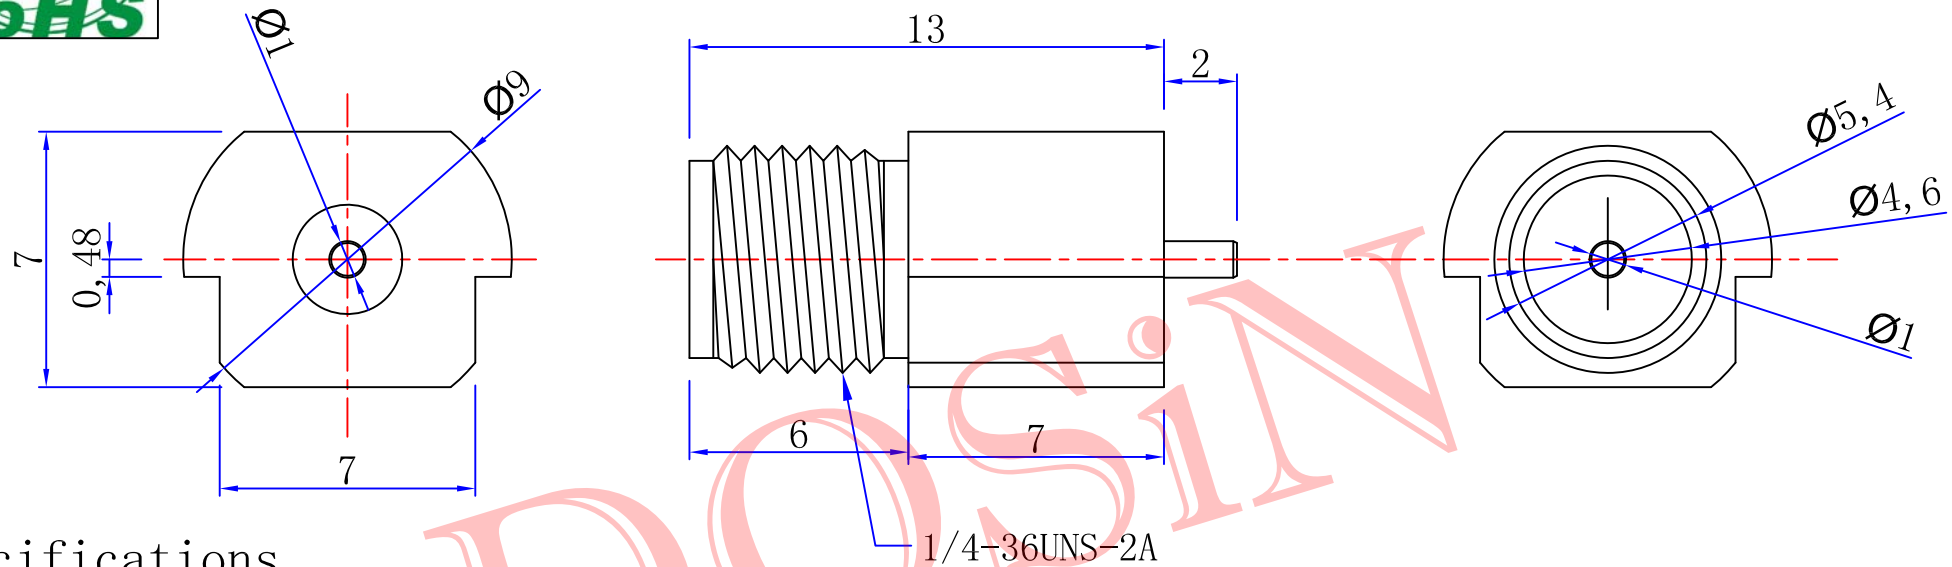

## Specifications

Impedance: 50 Ohms  
 Frequency Range: DC~2G  
 VSWR: 1.3MAX  
 Working Voltage: 500V rms @ sea level  
 Insulation Resistance: 5000 Ohms min  
 Temperature Range: -55°C TO +155°C  
 Relative Temperature:  $\leq 95\%$  ( $40^\circ\text{C} \pm 2^\circ\text{C}$ )  
 Drawings products are in line with ROHS standards

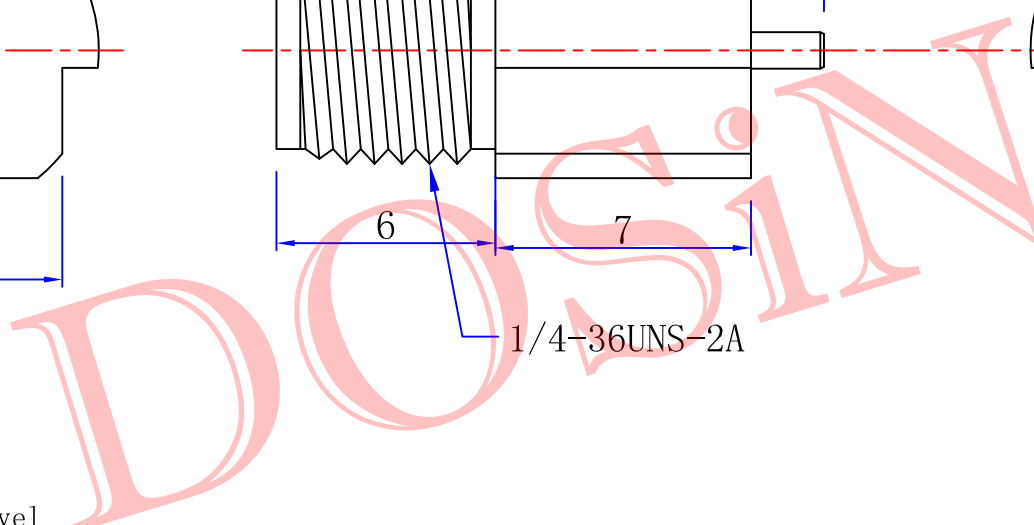

1	Body	Brass	Gold:1-1.5Mi"	NOTE:	Tolerance	X.	$\pm 0.25$	Dosin Industrial (H.K) Co. Ltd 东莞市德索五金电子制品有限公司 Dosin Hardware Electronics Co., Ltd	E-mail: dosin2005@163.com
2	Center contact	Brass	GOLD:1-1.5Mi			X.X	$\pm 0.30$		dosin2005@dosin-china.com
3	Insulator	PTFE	White			X.XX	$\pm 0.20$		Web: http://www.dosinconn.com
4				ANGULAR	$\pm 5^\circ$	TEL: (0086) 769-81153906			
5						FAX: (0086) 769-81875836			
6									
7				DRAWN	2012/04/05	Name: SMA CONNECTOR			
8				MR. ZHANG		SIZE	Product NO.	DOSIN-806-0043	REV
9				CHECKED		A			A
10				APPROVALS	06/04.2012	UNIT	MM	DateTime	2012/04/05
NO	Component Number	Material	Finish	John Kine		SCALE	1:1	CAD FILE	D/company drawings/BD
								SHEET: 1 OF 1	