




Product NO.		RHT-614-0219			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	Gavin	2018/03/12	JIM.KING	

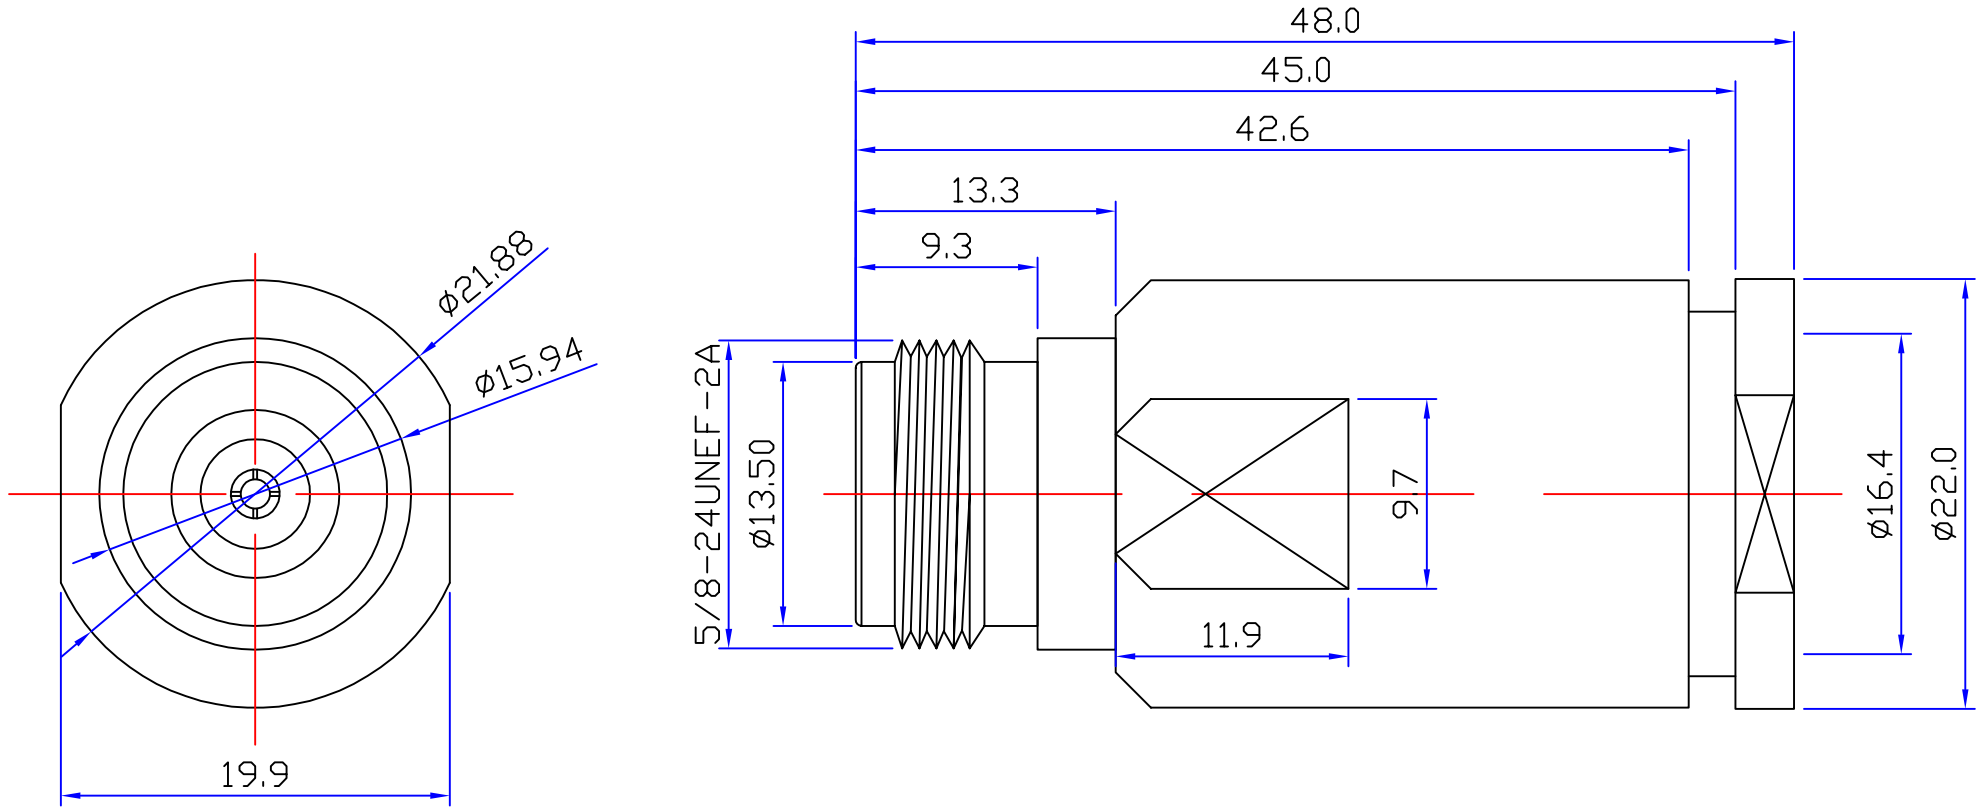

Specifications

Impedance: 50 Ohms
 Frequency Range:0-11G
 VSWR:1.3MAX
 Working Voltage:1000 VRMS(max at sea level)
 Dielectric Withstanding Voltage:1500 vrms(max at sea level)
 Insulation Resistance:5000 Ohms min
 Durability Mating:500 Cycles min
 Temperature Range:-65°C TO +165°C

3	PIN	BRASS	GOLD	1
2	INSUKATON	TEFLON	WHITE	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC GROUP www.renhotec.com				
	PART DESCRIPTION: N JACK FOR LMR600 CABLE				
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 -120mm ± 0.50mm	Appd: JIM.KING	P/N: RHT-614-0219			
Check:	Date	Scale	Unit	Type	Page
Draw: Gavin	2018/03/12	Free	MM	Z	1/1