




Product NO.			RHT-618-0456		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
First	First issue	Gavin	2018/06/09	JIM. KING	

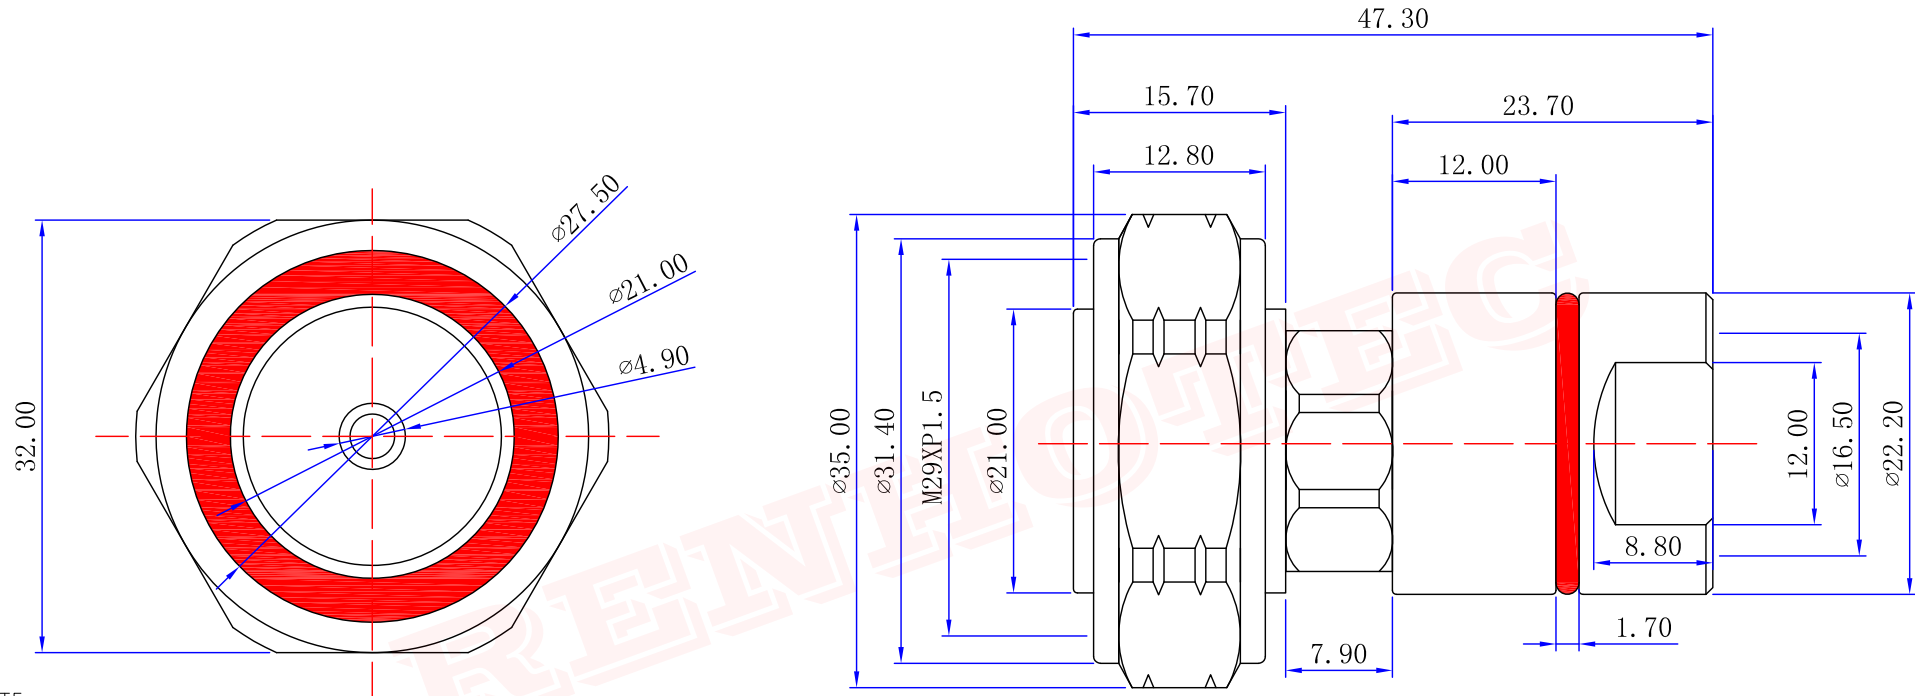

NOTE:

ELECTRIC PERFORMANCE  
 IMPEDANCE ( $\Omega$ ) : 50  
 FREQUENCY RANGE : DC-6GHz  
 VSWR :  $\leq 1.065$  (DC-3GHz)  
 :  $\leq 1.2$  (3-6GHz)  
 INSERT LOSS (dB) :  $\leq 0.1$   
 PIM(dBc) :  $\leq -160$  (2X4.3dBm)  
 INSULATION RESISTANCE ( $M\Omega$ ) :  $>5000$   
 PROOF VOLTAGE(V) : 2500  
 CONDUCTOR RESISTANCE ( $m\Omega$ ) : OUTER CONDUCTOR  $<0.2$   
 INNER CONDUCTOR  $<0.8$

4	GASKEL	SILICONE	RED	1
3	PIN	BRASS	SILVER	1
2	INSUKATON	PTFE	NATUPAL	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b> <a href="http://www.renhotec.com">www.renhotec.com</a>	
	PART DESCRIPTION: 7/16 PLUG FOR RG213 CONNECTORS	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm 0.10$ mm 8 - 30mm $\pm 0.15$ mm 30 - 120mm $\pm 0.20$ mm	Appr: JIM. KING	P/N: RHT-618-0456
	Check:	Date: 2018.06.09
	Draw: Gavin	Scale: Free
		Unit: MM
		Type: Z
		Page: 1/1