





SPECIFICATIONS

Impedance: 50ohm
 Frequency range: DC~6GHz
 Temperature range: -55° to + 155°C
 2002/95/EC (RoHS): Compliant

MECHANICAL SPEC

Engagement force: max. 15N
 Separation force: min. 6N~max. 15N
 Durability: 500 Cycles

Product NO.	Renhotec-631-0108			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/24	John kine

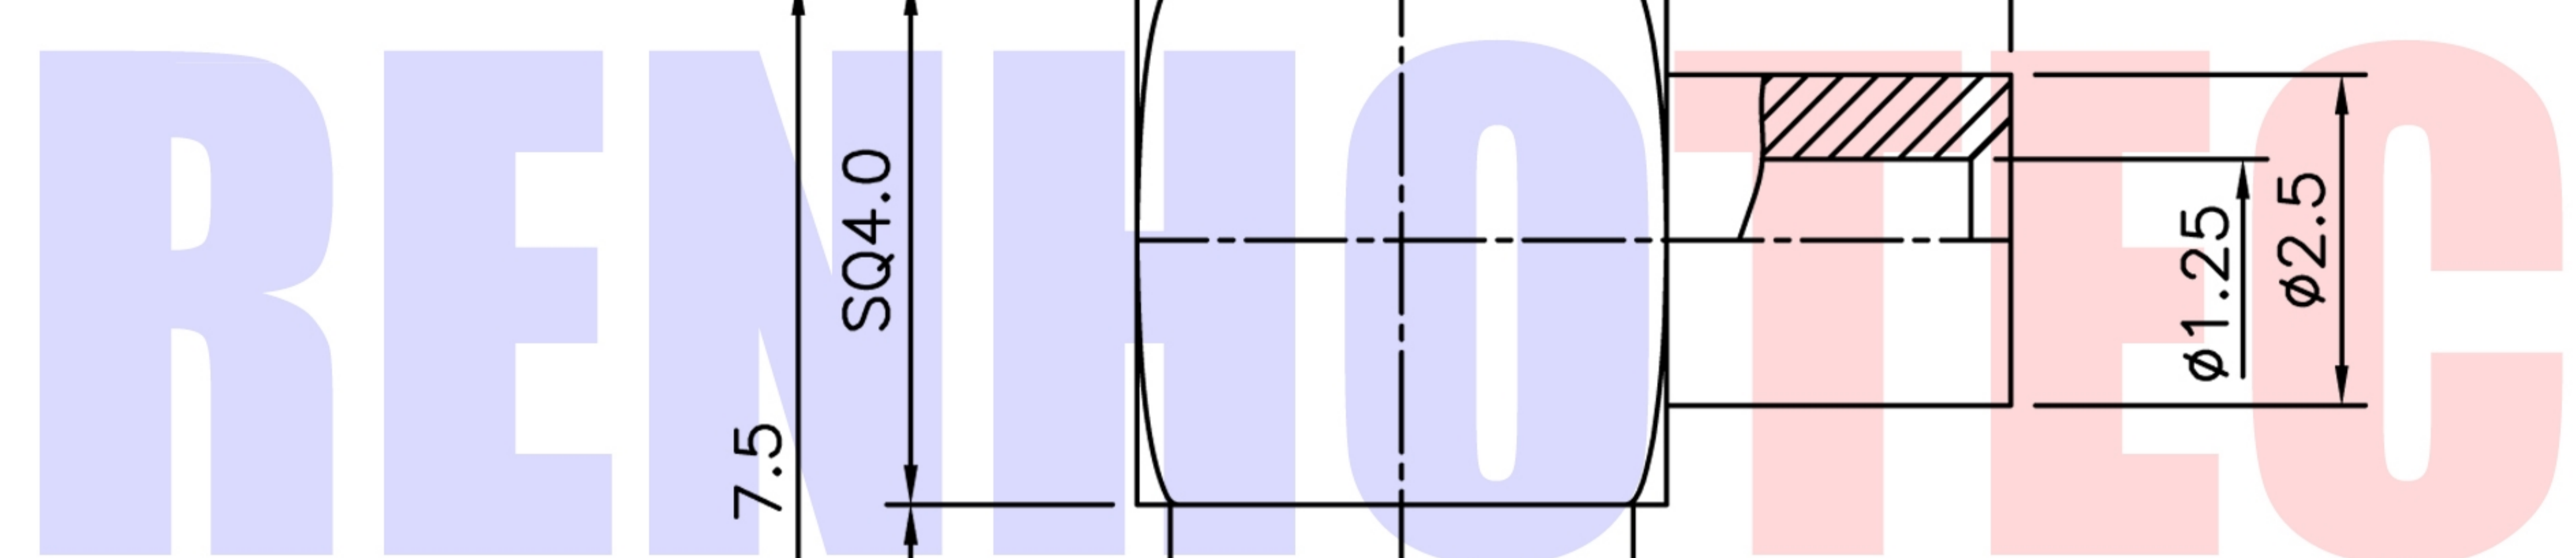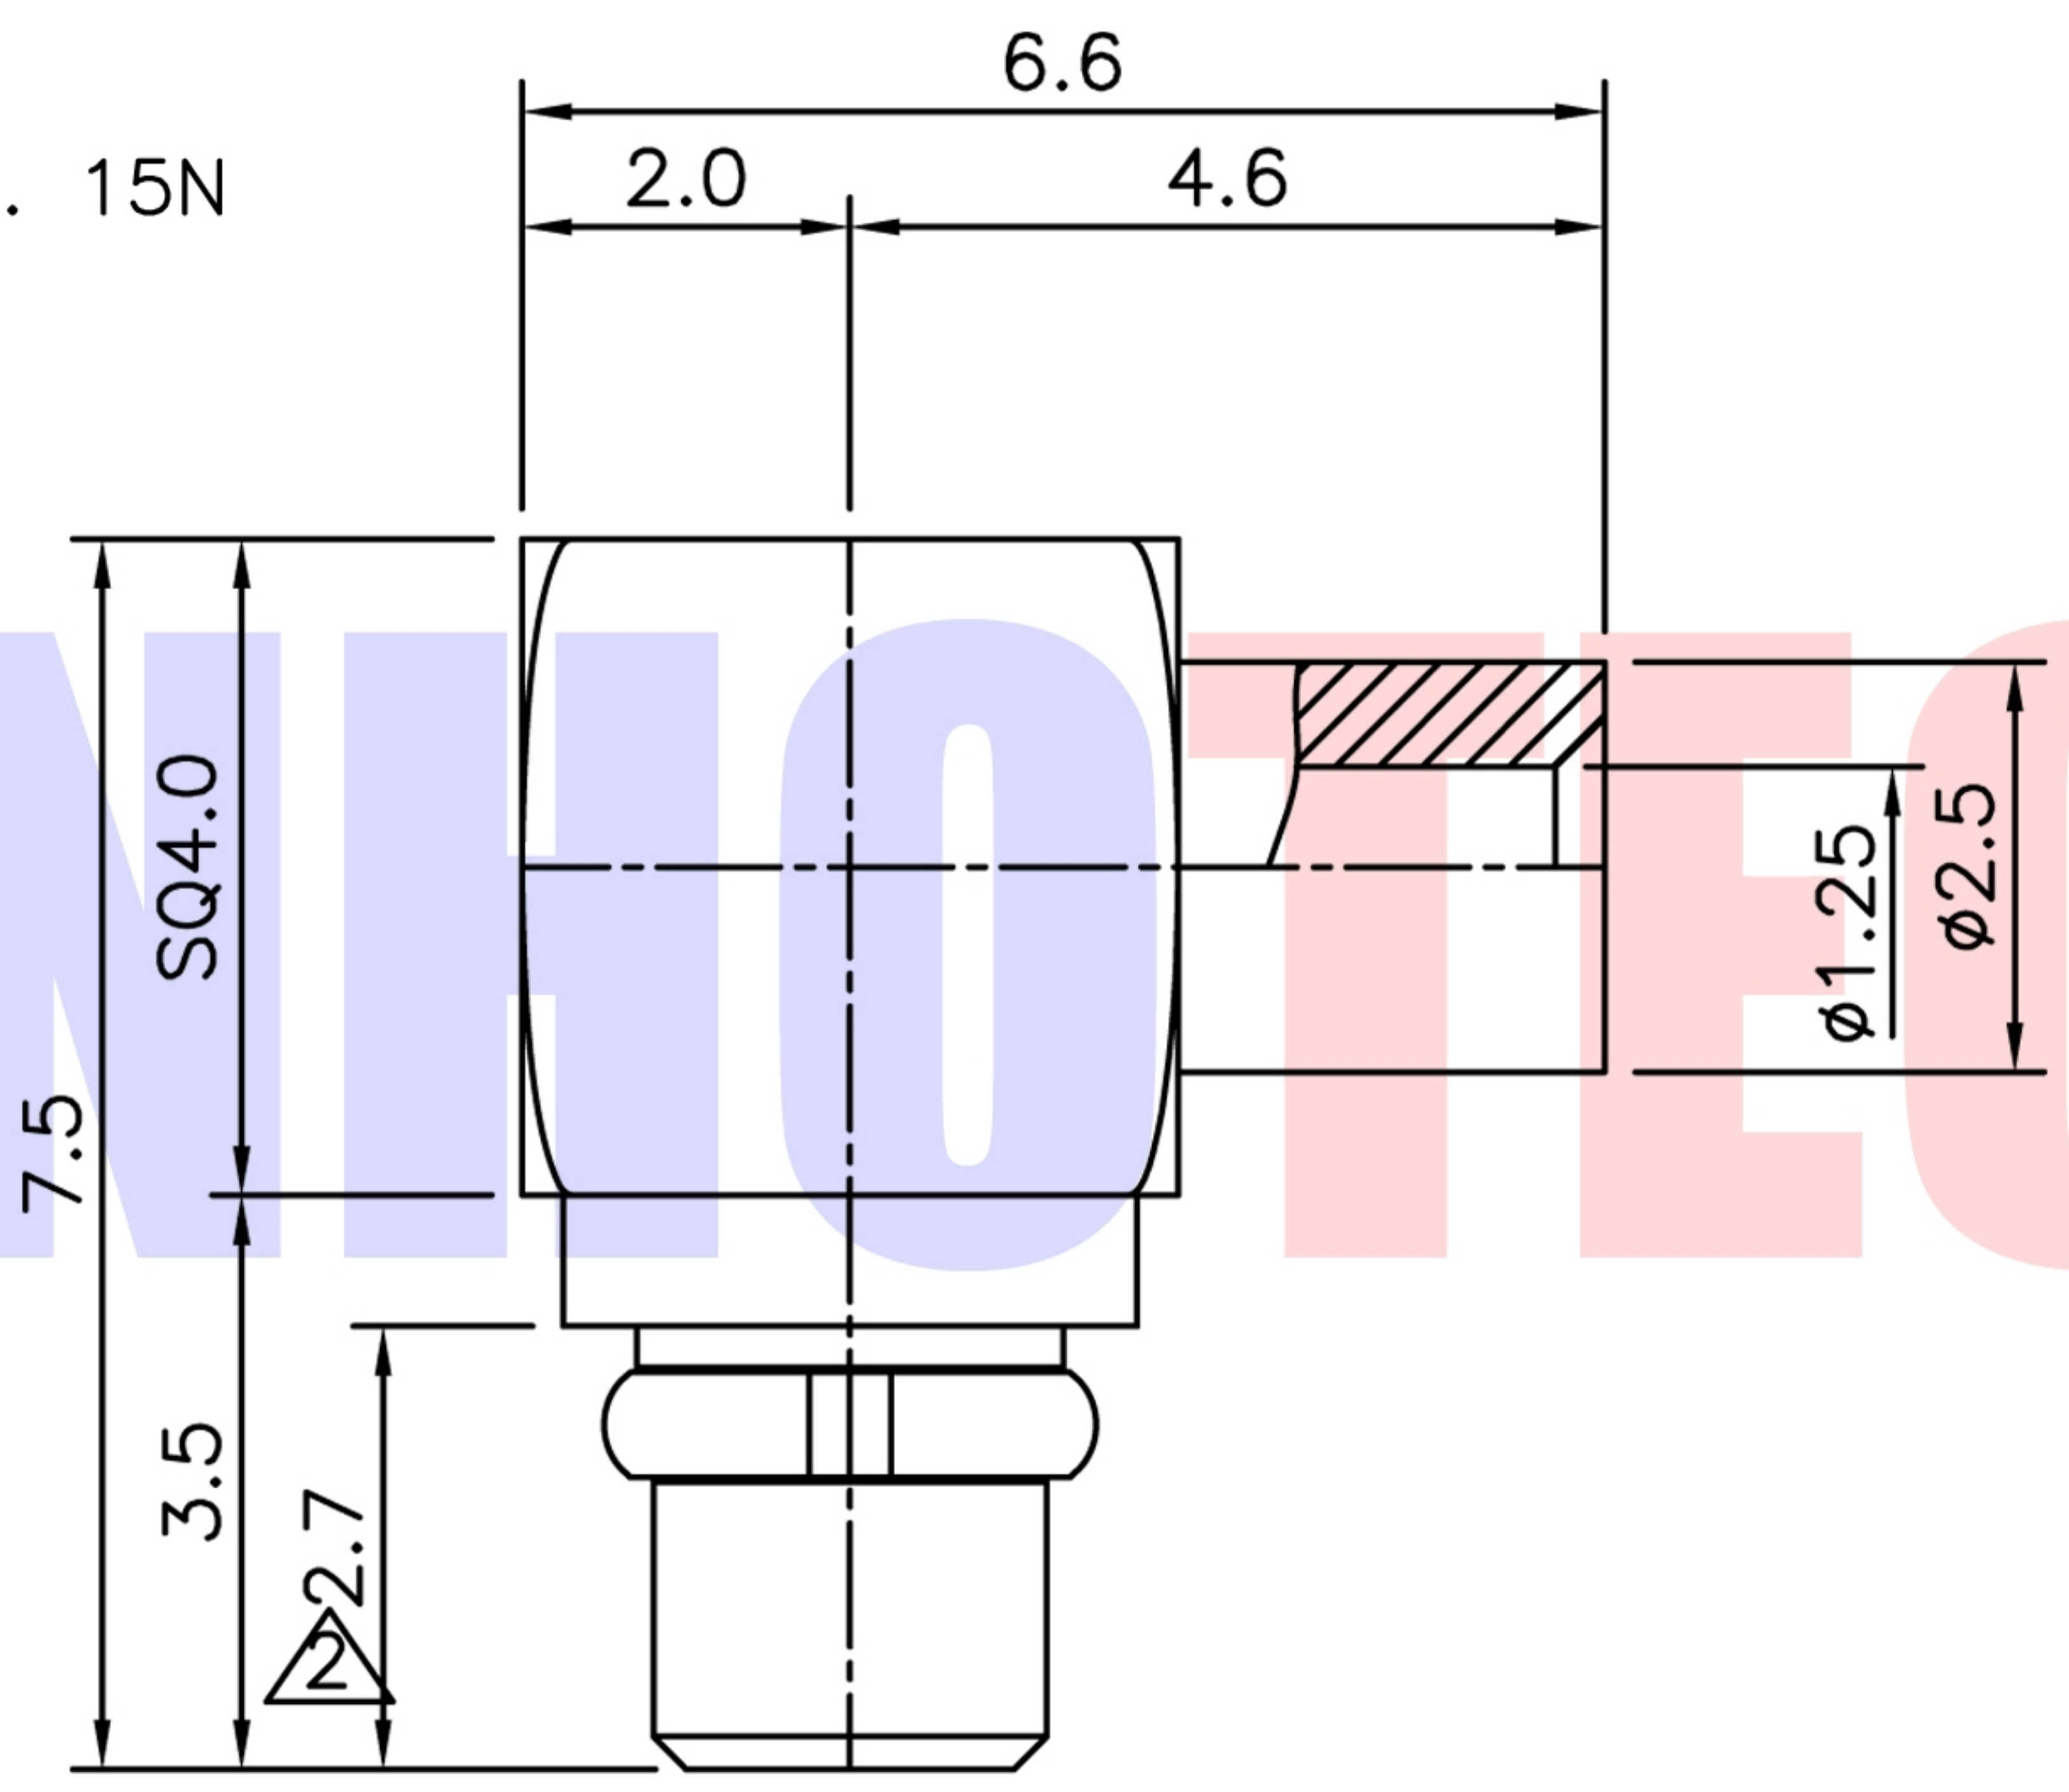

Item	Materials	Plating
Body	Brass	Gold Plated
C-Ring	Be-Cu	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6	±0.10
DRAWN Zelin. Zhang			6-30	±0.20
2017/2/24		View	30-120	±0.30
CHECKED			Angular	±2°
APPROVALS <i>John Kine</i>		UNIT	MM	
2017/2/24		SCALE	1:1	



RENHOTEC GROUP

Name: MMCX R/A Plug for-UT047			
SIZE A	Product NO. RHT-631-0108	REV B	
DateTime 2017/2/24	CAD FILE D/company drawings/BD	SHEET: 1 OF 1	