




Product NO.	Renhotec-612-0233			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/1	John kine

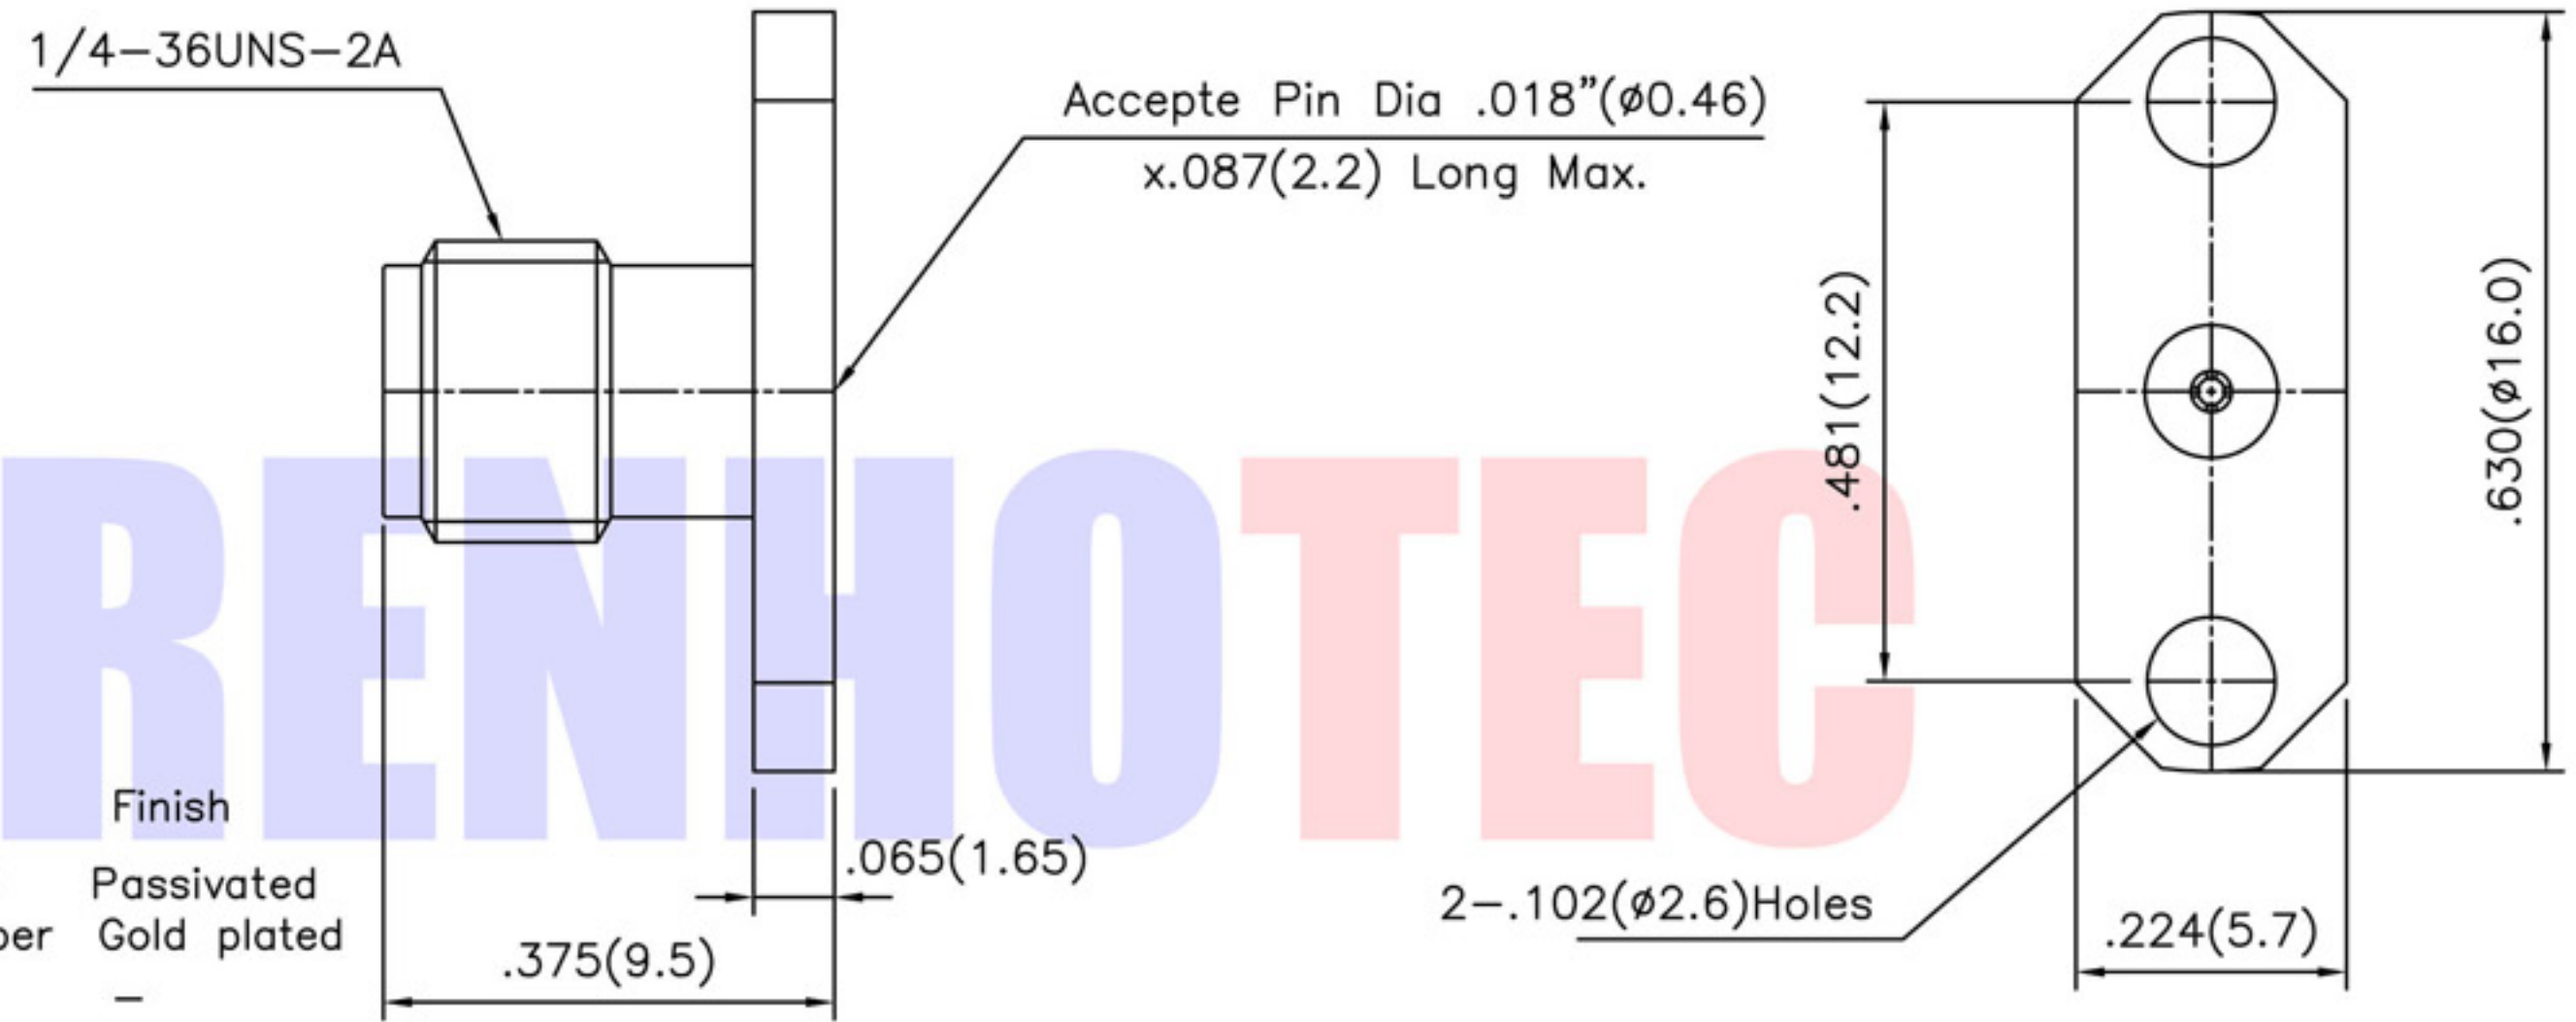

Connector parts	Materials	Finish
Body	Stainless steel	Passivated
Center contact	Beryllium copper	Gold plated
Insulator	PTFE	-

SPECIFICATIONS;  
 IMPEDANCE : 50 Ohms  
 Frequency Range : DC~20 GHz  
 Directric Withstanding Voltage : 750 VRMS  
 Insulation Resistance : 5000 meghms  
 Temperture Range : -55~125°C  
 VSWR : 1.05+0.01F. F Operating Frequency in GHz

NOTE:		Tolerance	0-6 ±0.10	<b>RENHOTEC GROUP</b> <a href="http://www.renhotec.com">www.renhotec.com</a>
			6-30 ±0.20	
DRAWN	2017/3/1	View	30-120 ±0.30	Name: SMA Jack 2Hole Panel (.018 inch PIN) Field Receptacle
CHECKED				
APPROVALS		UNIT	MM	SIZE A
John Kine		SCALE	1:1	Product NO. RHT-612-0233
2017/3/1		DateTime	2017/3/1	CAD FILE
		D/company drawings/BD		REV B
				SHEET: 1 OF 1