




ELECTRICAL RATINGS

Impedance : 50 ohm
 Frequency Range : DC~18GHz
 Insulation Resistance : 5000MΩ min
 Contact Resistance : < 3mΩ
 Working Voltage : 335 VRMS max
 Dielectric Withstanding Voltage : 1000V min

Product NO.	Renhotec-612-0271			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

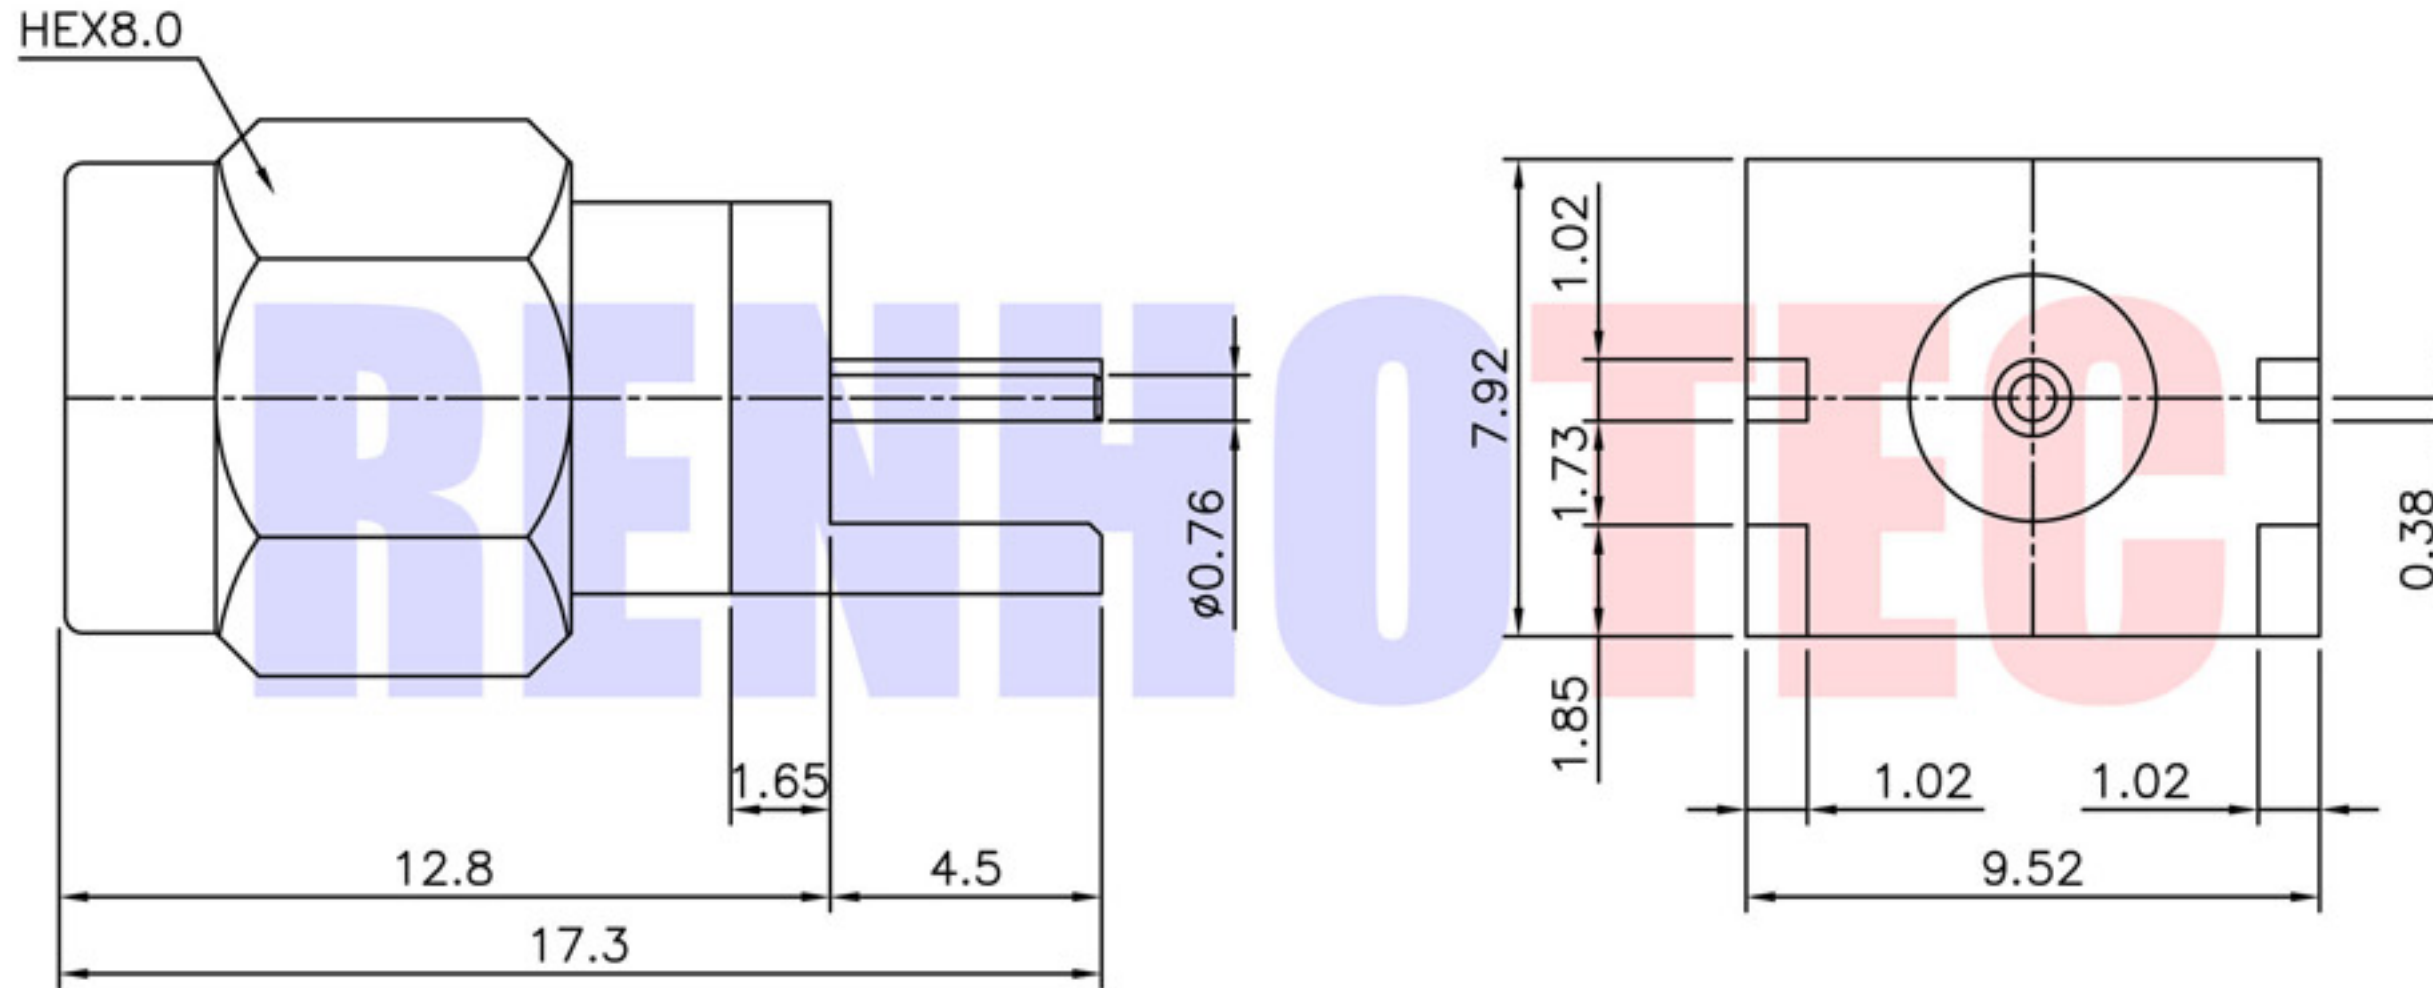

Connector parts	Materials	Finish
Coupling Cap	Brass	Gold Plated
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	TEFLON	-

SMA PCB Edge Mount Plug Receptacle
 -Round Contact(1.60mm Board)

NOTE:		Tolerance	0-6	±0.10	 www.renhotec.com	RENHOTEC GROUP
			6-30	±0.20		
DRAWN		View	30-120	±0.30	Name: Edge Mount SMA Plug	
Zelin. Zhang			Angular	±2°		
2017/3/2		UNIT			SIZE	Product NO. RHT-612-0271
CHECKED			MM		A	
APPROVALS		SCALE	1:1		DateTime	CAD FILE
John Kine			2017/3/2		2017/3/2	
				D/company drawings/BD		SHEET: 1 OF 1