




ELECTRICAL RATINGS

Impedance: 50ohm
 Frequency Range: DC~18GHz
 Insulation Resistance: 5000MΩ min
 Contact Resistance: < 3MΩ
 Working Voltage: 335 VRMS max
 Dielectric Withstanding Voltage: 1000V min

Product NO.	Renhotec-612-0272			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

1/4-36UNS-2A

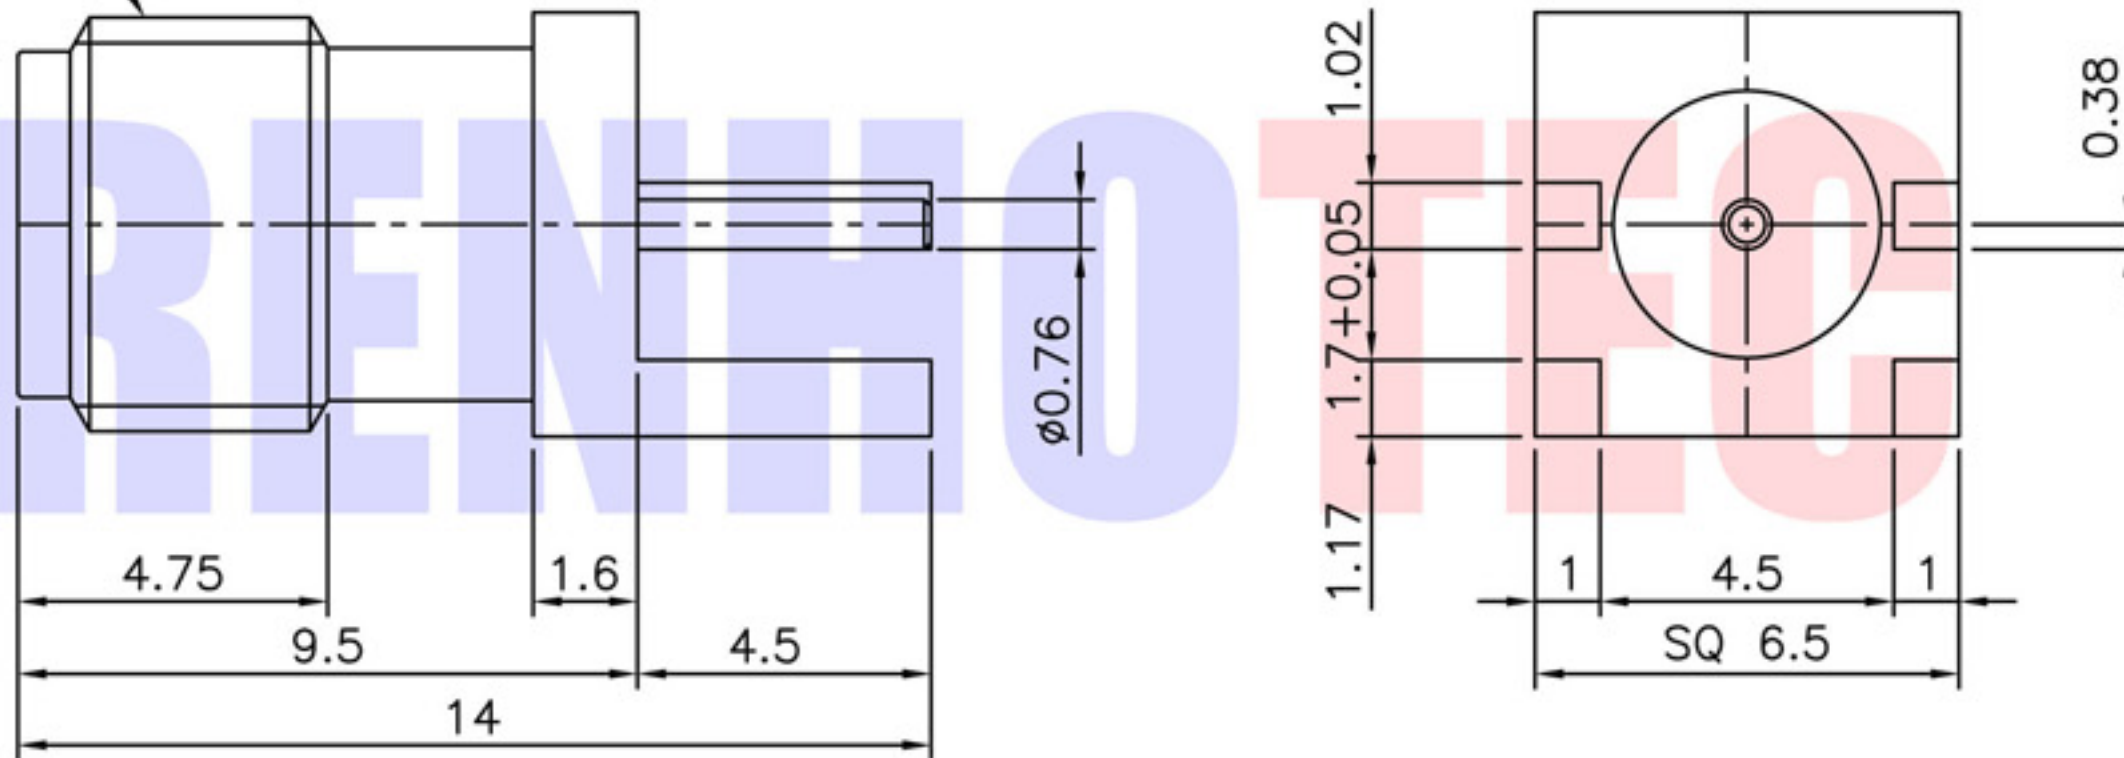

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	TEFLON	-

SMA-PCB Edge Mount Jack Receptacle
 -Round Contact(1.60mm Board)

NOTE:	Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°
DRAWN Zelin. Zhang 2017/3/2	View	
CHECKED	UNIT	MM
APPROVALS John Kine 2017/3/2	SCALE	1:1



RENHOTEC GROUP

Name: Edge Mount SMA Jack		
SIZE A	Product NO. RHT-612-0272	REV B
DateTime 2017/3/2	CAD FILE D/company drawings/BD	SHEET: 1 OF 1