




ELECTRICAL RATINGS

Impedance : 50 ohm
 Frequency Range : DC~18GHz
 Insulation Resistance : 5000MΩ min
 Contact Resistance : < 3mΩ
 Working Voltage : 335 VRMS max
 Dielectric Withstanding Voltage : 1000V min

Product NO.	Renhotec-612-0273			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

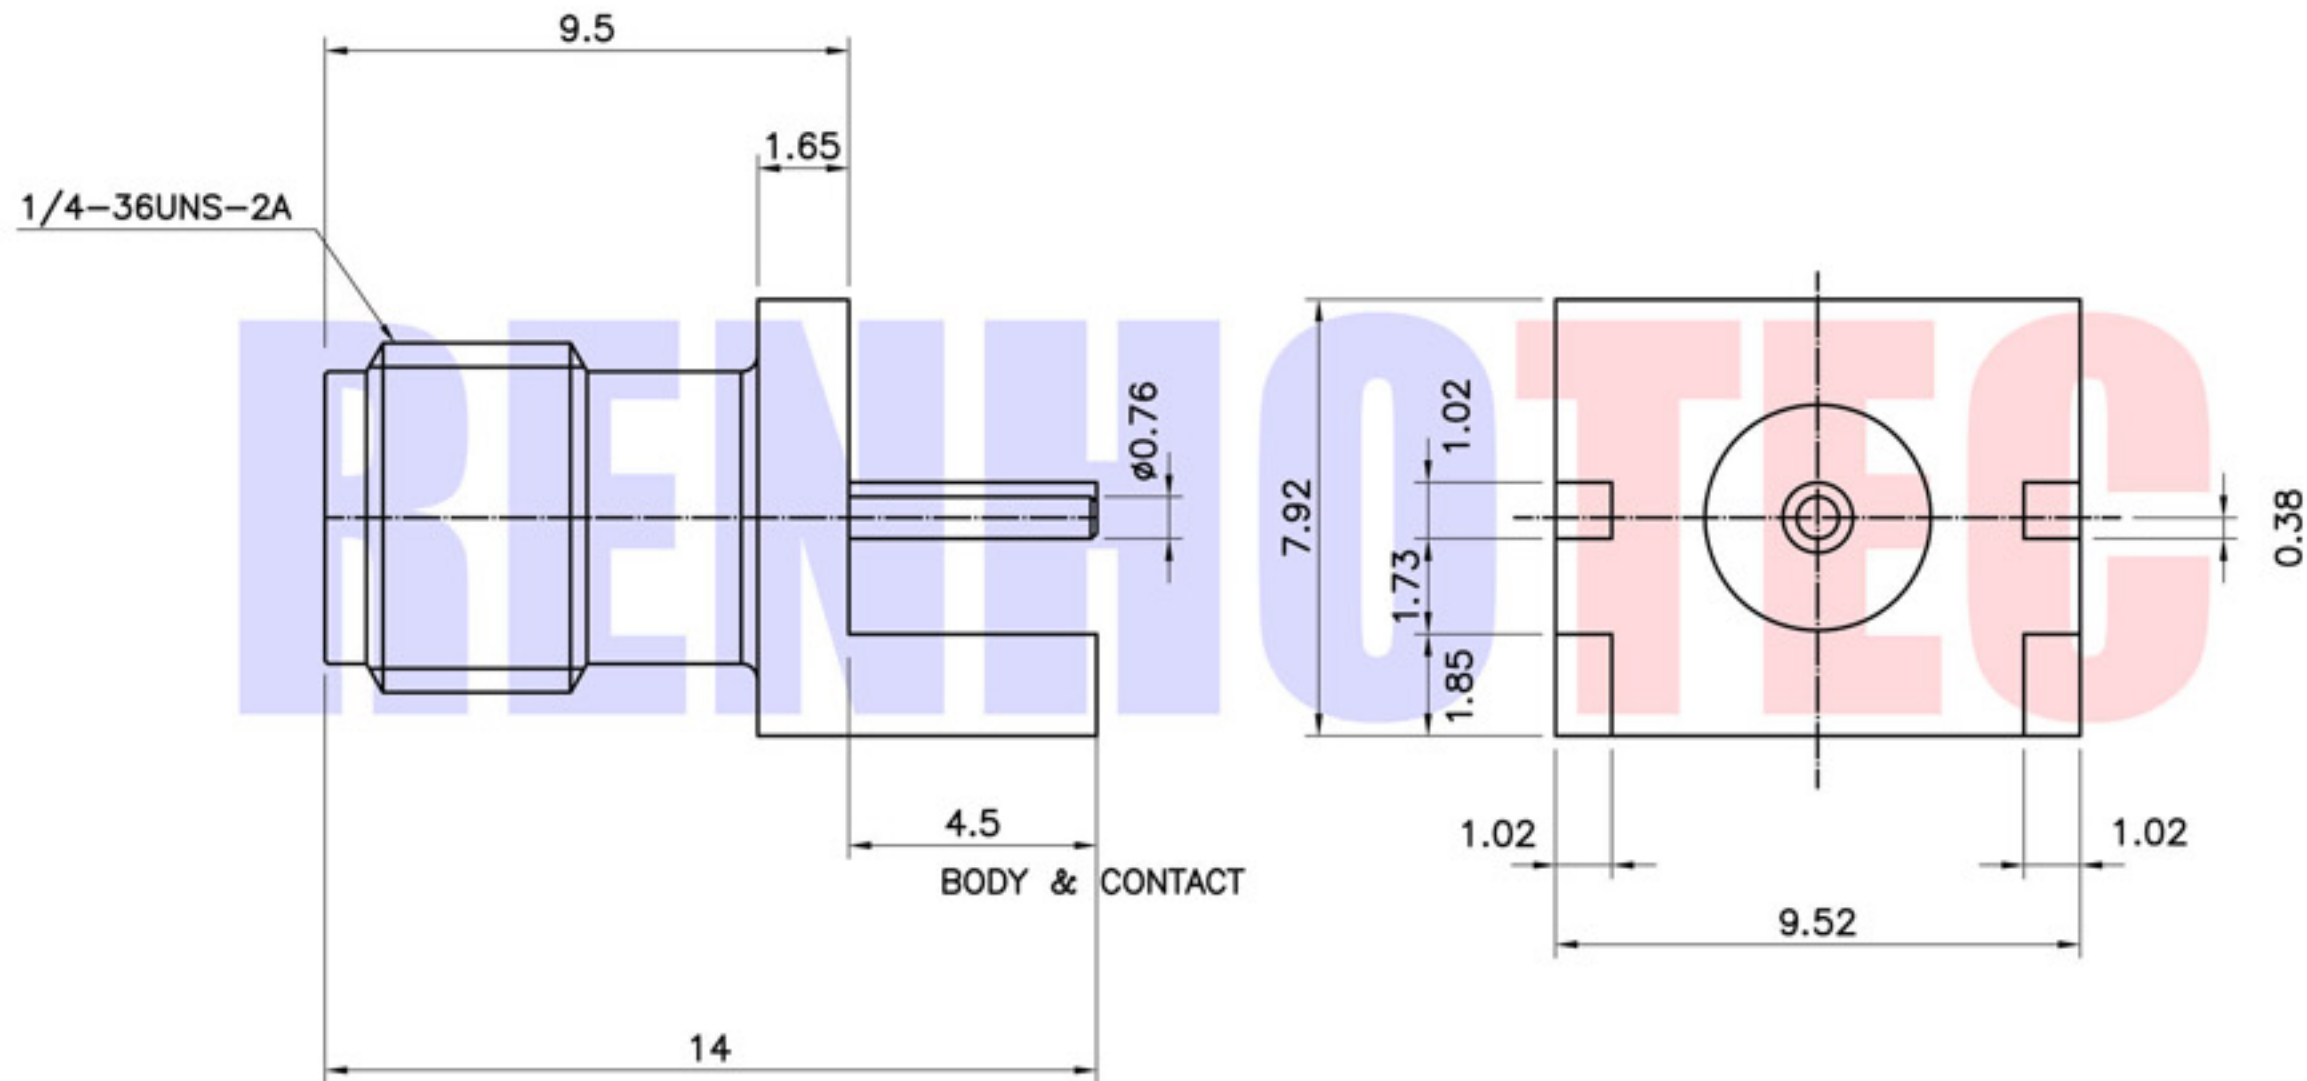

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
Insulator	TEFLON	-

SMA PCB Edge Mount Jack Receptacle
 -Round Contact(1.60mm Board)

NOTE:		Tolerance 0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 www.renhotec.com		
DRAWN Zelin. Zhang	2017/3/2				
CHECKED		View	Name: Edge Mount SMA Jack		
APPROVALS John Kine	2017/3/2	UNIT	MM	SIZE A	Product NO. RHT-612-0273
		SCALE	1:1	DateTime 2017/3/2	CAD FILE D/company drawings/BD
					SHEET: 1 OF 1