




### SPECIFICATION

Impedance : 75 ohm  
 Insulation Resistance : min. 1000megohms  
 Working Voltage : 250V  
 Durability : 500 cycles min  
 Contact Resistance Inner Conductor : < 1.0mΩ

Product NO.	Renhotec-626-0202			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First Issue	Mr. Wang	2017/3/6	John kine

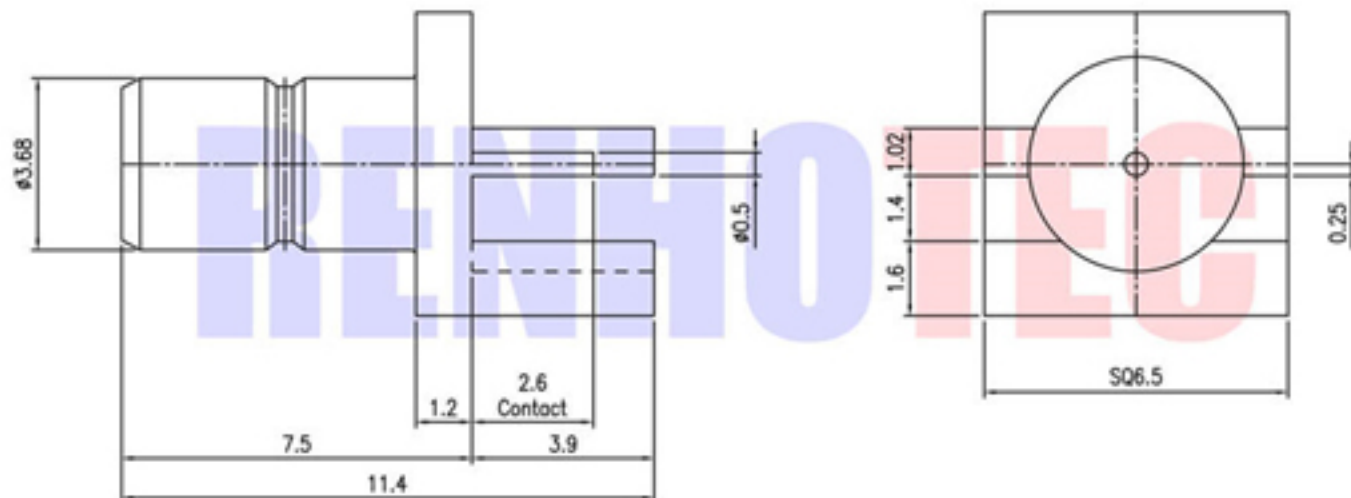

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-

SMB End Launch JACK Receptacle-75 OHm  
 -Round Contact(1.30mm PCB)

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°		<b>RENHOTEC GROUP</b>
DRAWN	2017/3/6				
Zelin Zhang		View		Name: Edge Mount SMB Jack	
CHECKED		UNIT	MM	SIZE	Product NO. RHT-626-0202
APPROVALS	2017/3/6	SCALE	1:1	DateTime	CAD FILE
John Kine				2017/3/6	D:/company drawings/BD
					SHEET: 1 OF 1