Product NO.	RHT-610-0104			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	SAM	2017/03/14	JIM.KING

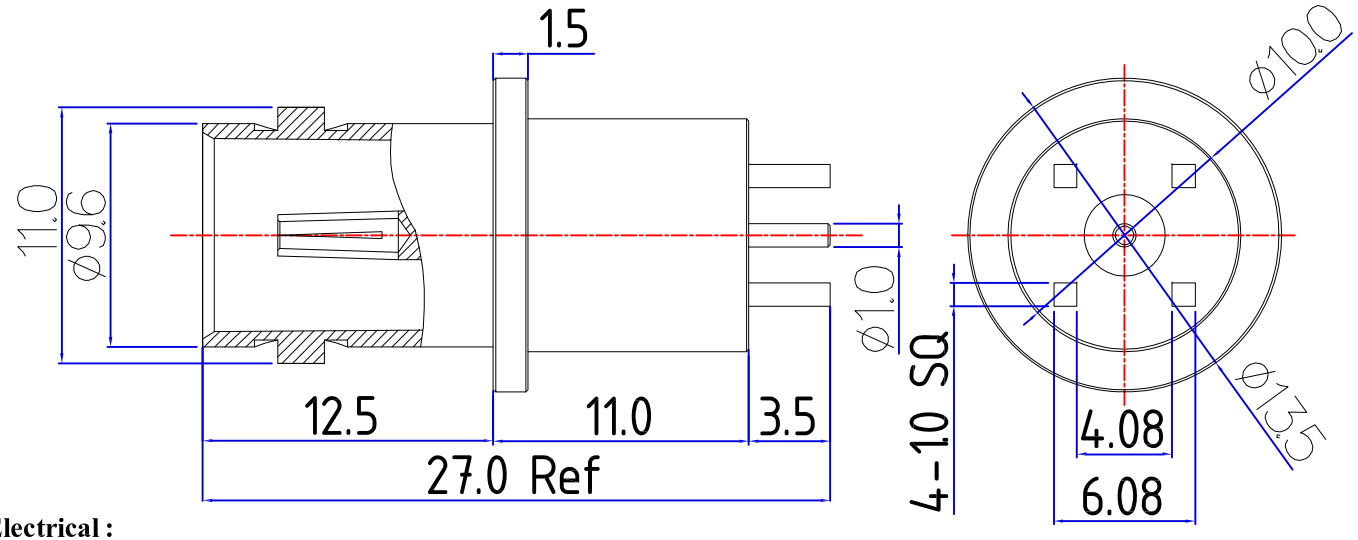

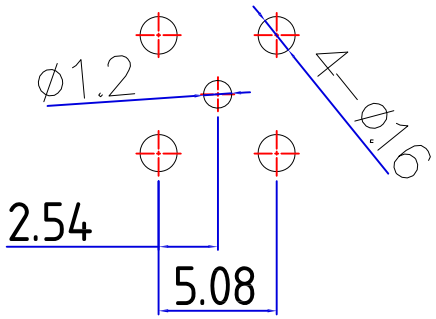

Recommended PCB LaYou

Electrical :

ImPedance : 75 ohm

FrequencY RanGe : 0~6 GHz .

VoltaGe RatinG : 500 V rms.

Insulator Resistance : ≧5GW

Dielectric WithstandinG VoltaGe : 1000 V rms .

Contact Resistance : Center Contact ≦3mW.

Outer Contact ≦2.5mW .

TemPerature RanGe : -65°C to 165°C

Mechanical :

MatinG : BaYonet CouPlinG.

NO	Component Number	Material	Finish
1	Body	BRASS	Gold:1-1.5u″
2	Contact pin	Beryllium copper	Gold:1-1.5u″
3	Insulation	PTFE	None
4			
5			

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		RENHOTEC www.renhotec.com RENHOTEC GROUP					
			Title: BNC S/T Jack PCB Mount Type(75OHM)				
0. =±.15	0.° =±3.0°	Appd:	P/N: RHT-610-0104				
0.0 =±.10	0.0° =±2.5°	Check: Xiong Tan	Date	Scale	Unit	Type	Page
0.00=±.05	0.00° =±2.0°	Draw.: Owen	2017.03.14	Free	MM	Z	1/1